

# TULSA PERA

## Scenery Rental Information Sheet

Production Name: **Into The Woods**

### **Production Information:**

Scenic Designer: Kevin Depinet  
Built: 2016, Theatre Under the Stars; Houston, TX  
Period: Fairytale Fantasy  
# of Sets: 1  
# of 53' Trucks: 3 for scenery and props

### **Tulsa Team:**

Director: Tara Faircloth  
Lighting Designer: Helena Kuukka  
Stage Manager: Nan Luchini  
Costumes: Randy Blair

### **Fees:**

Scenery Rental Fee: \$20,000 (up to 4 performances)  
Additional Performances: \$2,000/ea  
Security Deposit: \$3,000 security deposit due at contract signing  
Designer Royalty: \$1,000 plus current USA contribution rates paid to Tulsa Opera  
Technical Supervisor: \$400 per day (travel and working) plus housing & transportation  
\$75 per diem. Deducted from Security Deposit.  
Insurance Required: \$300,000  
Shipping: To be paid by renter including load/unload labor

### **Tulsa Theatre Information:**

The production was presented at the Tulsa PAC, Chapman Music Hall, described below:

Width of Proscenium: 60'  
Height of Proscenium: 36'  
Height of Grid: 84'-6"  
Depth PL to back wall: 54'-6"  
Depth of Apron: 4'-10" at CL  
Wing Width SR: 18'  
Wing Width SL: 22'  
# of Line Sets: 88  
Depth PL to last line: 51'-9"  
Size of Loading Door: 13'-6"w x 12'h

**Set Technical Information:**

Min Width: 98'-0"  
Min Depth: 43'-6"  
Total # of line sets: 31  
Line sets for scenery: 8  
Line sets for electrics: 9  
Line sets for masking: 14  
Height of tallest drop: N/A  
Tripping of drops permitted: N/A  
Furthest upstage flying piece: 46'-0"  
Weight of Heaviest flyer:  
Dimensions of largest hard flying piece: 29'-3"w x 36'-0"h  
Dimensions of largest soft piece: N/A

Ten 1-ton chain motors and 70' of 12" box truss was used in the following configuration,  
False Proscenium - Four motors, 50' of truss  
Rapunzel's Tower Build - Two motors  
Curve Wall - Two motors, 20' of truss  
Moon Clock - Two motors

**Tulsa Crew:**

Crew sizes may vary for the renting company based on its schedule, venue, union agreements, etc.

<u>Load In/Out:</u>	<u>Total:</u>	<u>Run Crew:</u>	<u>Total:</u>
Carpenters:	12	Carpenters:	6
Flymen:	2	Flymen:	2
Props:	3	Props:	2
Electricians:	8	Electricians:	2
Audio:	2	Follow Spots:	3
Truck Loaders:	4	A/V:	2

Load In; Approximately 16 hours in length  
Load Out; Approximately 6 hours in length

**Prop Information:**

Hand Props - included with scenery  
Furniture - included with scenery  
Set Dressing - included with scenery  
Weapons - included with props


**Contact:**

Dana Stringer  
Director of Production  
918.636.1508  
[dstringer@tulsaopera.com](mailto:dstringer@tulsaopera.com)



Production Photos from Theatre Under the Stars



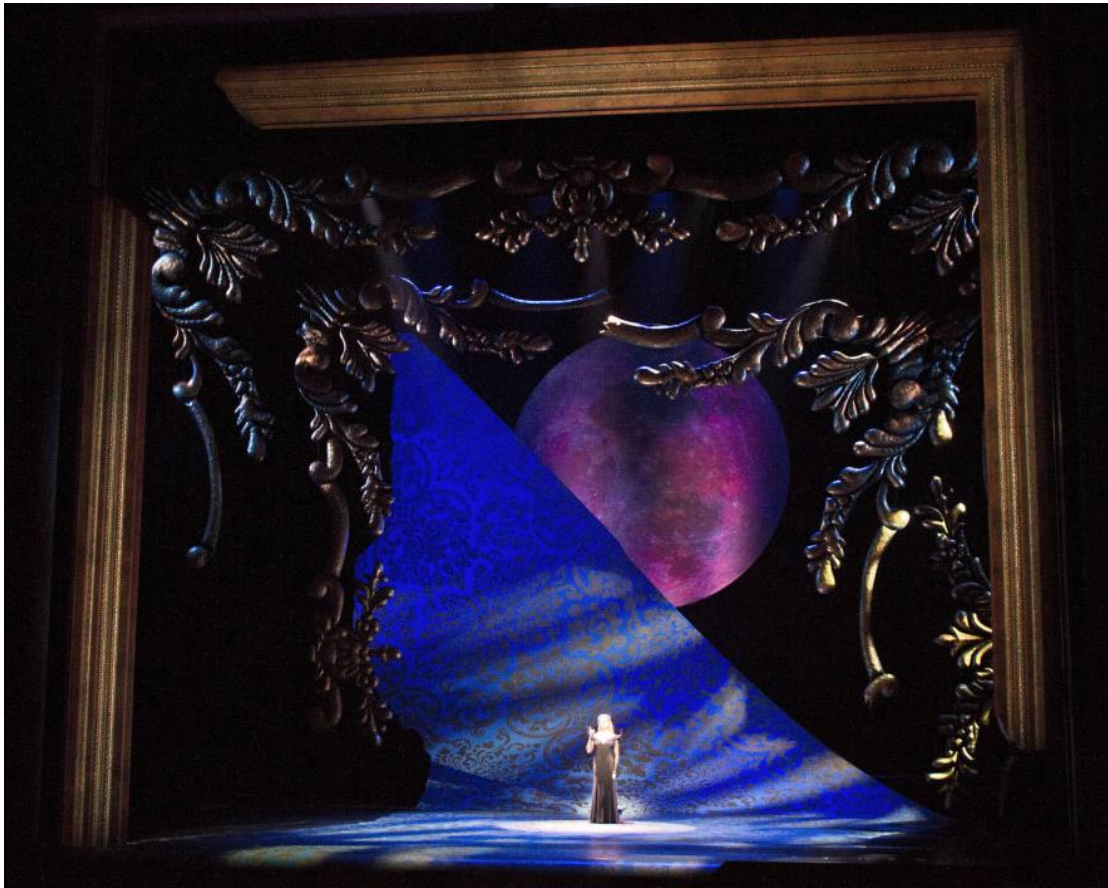

Production Photos from Theatre Under the Stars

